




CONTROL CONCEPTS

1020

Single-Phase Zero-Cross SCR Power Controller

Features

- Fast Cycling Distributive Zero-Cross Control
- Diagnostic LED
- Circuit Board Powered from 4/20mA Command Signal
- Compact Size
- Increased Heater Life
- Isolated Heatsink and Command Signal

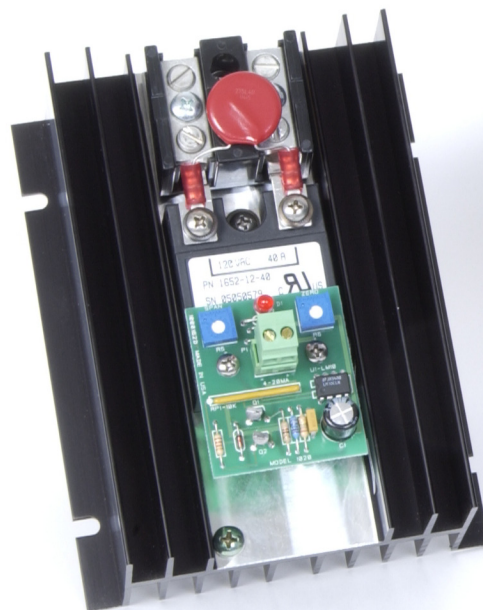

Description

The model 1020 is a single-phase, zero-cross SCR power controller that controls the electrical power applied to a single phase load by fast cycling, distributive zero-cross operation of a pair of SCRs. The power applied to the load is linear with respect to the 4/20mA command signal. The model 1020 is available with current ratings from 10 to 70 amps and voltage ratings from 120 to 575Vac.

The model 1020 is a compact and economical power control solution for industrial applications that require high reliability and long life. The circuit card is powered from the 4/20mA command signal, eliminating the need of a control transformer. The fast solid state switching of the model 1020 provides superior performance over relays, contactors and other slow cycling controllers by reducing temperature variations associated with the longer ON/OFF cycles of those devices. The result is a more precise control of the heating process and extended heater life. Zero-cross control generates minimal RFI noise, virtually eliminating the possibility of interference with other electronic equipment.

Applications

- Electric Ovens, Furnaces, and Kilns
- Environmental Chambers
- Contactor Replacement
- Resistance Heating
- Platen Heaters
- Extruders




LISTED 3L32
INDUSTRIAL
CONTROL
EQUIPMENT
E136219





CERTIFIED
BY UL TO
CANADIAN
NATIONAL
STANDARDS

Wiring

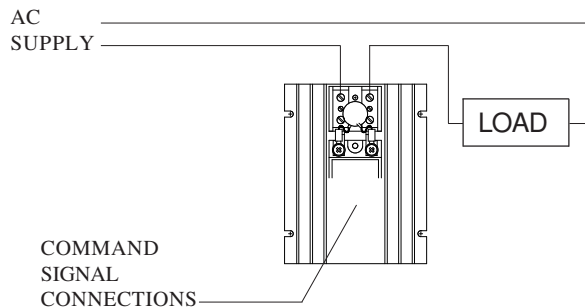

Dimensions

(inches)

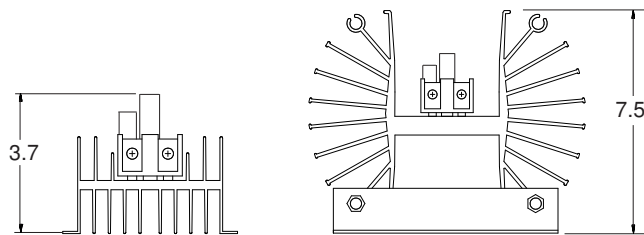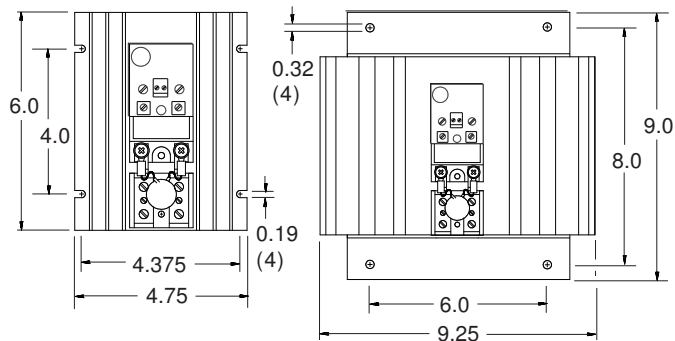

10 to 40 AMP

70 AMP

Specifications

Control Mode	Single-phase, zero-cross distributive control of the load power.
Command Signal	4 to 20 Milliamp. Input impedance, at 20 mA, equivalent to 350 ohms. 7 Volt max voltage drop.
Control Range	0 to 100% of line voltage.
Linearity	Load power is linear with respect to the command signal.
Zero and Span	User adjustable over a range of 20% of span. Factory preset.
Isolation	Dielectric strength, input/output and load voltage/heatsink: 2500V(RMS)
Mounting	Panel mount. Heatsink fins vertical.
Line Voltage	120, 240, 480, and 575 Vac +10%, -50%, 50/60 Hz. Other voltages available.
Line/Load Connections	Compression lugs accept #2 to #14 Copper or #2 to #8 Aluminum.
Load Current	Models available with current ratings of 10, 20, 30, 40 or 70 Amps.
dv/dt and Transient Voltage	200 volts/microsecond minimum. Uses a dv/dt snubber and a metal oxide varistor (MOV).
Cooling	Convection.
Weight	10A thru 40A, 2 pounds; 70A, 6 pounds.
Temperature	Operating: 0 to +55 C (+32 to +131 F) Storage: -40 to +80 C (-40 to +176 F)
Heat Dissipation	1.5 Watts per amp of controlled current.
Fusing	Special semiconductor fuses are not required. Class T fuses are recommended to protect controller and load.

Ordering Information

1020 Single Phase, Zero Cross SCR Power Controller.

Voltage Rating: 12=120V, 24=240V, 48=480V, 57=575V. Other Voltages Available.

Current Rating: 10, 20, 30, 40, or 70 Amps.

Command Signal: 4/20mA. Other commands available.

1020 — 48 — 40 — 4/20mA

About Control Concepts

Control Concepts, Inc., with a full range of standard and custom SCR power controllers and signal conditioners, has the expertise to meet your specific industrial power control needs. The 1600-PM6-01, "6•PAK™" provides six 70 Amp 1020 SCR controllers in 14.5 x 7.5 inches of panel space. All Control Concepts products are covered by a limited two year warranty.

Call us for answers, and delivery schedules, that work.



800.765.2799 | www.ccpower.com

Phone: 952.474.6200 Fax: 952.474.6070
7870 Park Drive, Chanhassen, MN 55317, U.S.A.